

TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)

History		Sequence No.					24
OKAS CODE	39	1	1	3	4	0	0

DMO CATALOG CODE NO	
NAME OF THE PRODUCT	Study Chair
ORIGINAL PRODUCT CODE (P/N)	SANDAX 100 CA
PRODUCT BRAND / MODEL	Goldsit/SANDAX



TECHNICAL SPECIFICATIONS

STUDY CHAIR


Foot Structure	STAR FOOT
Width (mm)	610
Depth (mm)	620
Height (mm)	1020
Backrest Upholstery Material	NET FABRIC
Foot Material	ALUMINUM INJECTION
Armrest Material	METAL AND BLACK POLYPROPYLENE
Other Features	USES SILENT HARD FLOOR WHEEL.
For Technical Drawing/Drawing	

Company official name signature and	
-------------------------------------	--

DESCRIPTIONS
 Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of



SANDAX 100 CA STUDY CHAIR

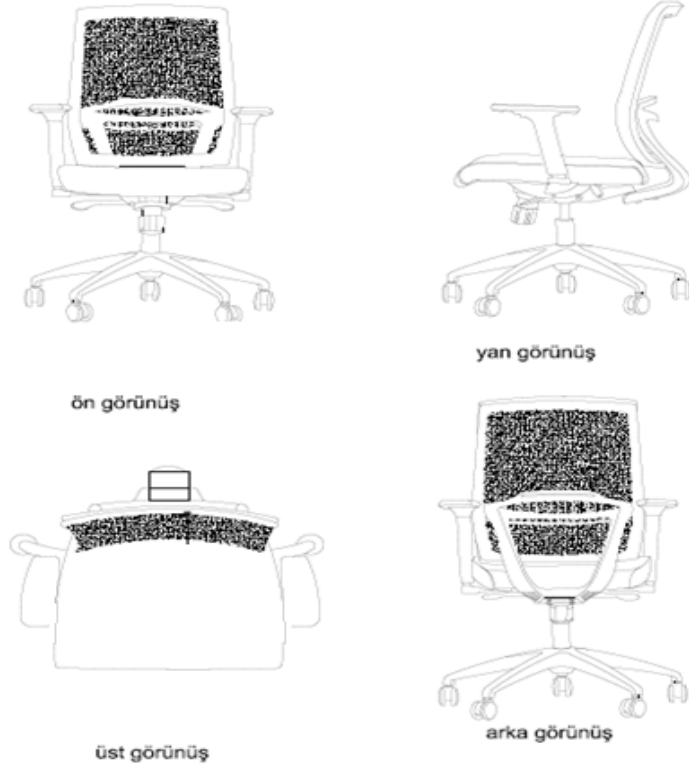

- Seating Depth	: 450mm
- Seating Surface Width	: 500mm
- Height of Upper Back Edge from Seating Surface	: 580mm
- Back Width	: 470mm
- Star Foot Diameter	: 700mm
Width	: 610mm
Depth	: 620mm
Height	: 1020mm

THE BACK IS PLASTIC AND WITH MESH. IT HAS PLASTIC MOVABLE WAIST SUPPORT.

BACKGROUND WITH ITS MECHANISMS, SEATS AND BACKS THAT CAN MOVE SIMULTANEOUSLY ABOUT AN AXIS OR CAN MAKE BACK ANGLE ADJUSTMENT (SYNCHRONIZED), AGAINST ANY DEGREE OF ITS BACK ATTITUDE, SEATING LOCATION AND BUTHOUSE APPLICATION CANNOT BE ABLE TO MAKE A POOLITY ENERGY, BAYTONIZENY APARTMENT 3, A POOLITYA ENERGY APARTMENT, A POOLETY, APPROACH, BAYATHENS. SYNCHRONIC MECHANISM WITH SPRING PRESSIIRF

FIVE STAR FORM POLISHED, OCTOPUS ALUMINUM FOOT. SHOCK ABSORBER HUB FEDER SUPPORT 1.700 Kg ±50 g. .WHEELS ARE Ø11 mm WITH RING PIN, 50mm Ø DOUBLE, MADE OF PLASTIC MATERIAL IMPORTED FROM TAIWAN.SILENT WHEEL IS USED.

Fabric at least 90% Polyester, at least 210 gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m²

PP COPOLIMER PLASTIC AND METAL OVAL PIPE MATERIAL NICKELATED HEIGHT ADJUSTABLE, ARMRESTS WITH POLYURETHANE (INTERIOR PLASTIC FRAME).

HIGH PRESSURE MACHINES WITH PLC CONTROL IN ALUMINUM MOLDS MADE SPECIALLY TO THE MODEL Min. 45 Kg/m³ BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

SEAT MIN. IT CONSISTS OF BEEKEN PAPE FORM FORM WITH 11 mm THICKNESS. THE BOTTOM OF THE SEAT HAS A PP MATERIAL PLASTIC COVER.

IMPORTED CLASS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.