



CASANOVA 100 N WORK CHAIR

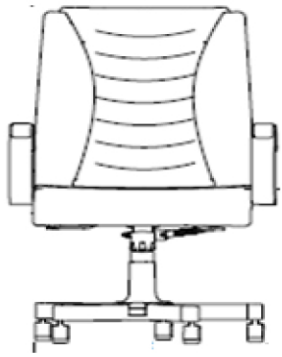


ön görünüş

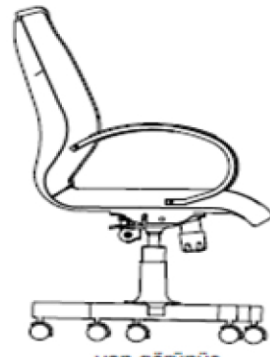

yan görünüş



üst görünüş




arka görünüş

- Seating Depth	: 500mm
- Seating Surface Width	: 560mm
- Height of Upper Back Edge from Seating Surface	: 570mm
- Back Width	: 510mm
- Star Foot Diameter	: 680mm
Width	: 660mm
Depth	: 650mm
Height	: 1010mm

MONOBLOCK min. ON 11 mm FORMED BEEK PLYWOOD Min. 45 Kg/m³ BULK SPONGE IS USED.

MECHANISM SEAT AND BACK MOVING SIMULTANEOUSLY ABOUT AN AXIS. LOCKING IN AT LEAST 3 POSITIONS, (SYNCHRONIZED) BACK TILT TILT MECHANISM.

FIVE STAR 20x30x1.5mm BEECH WOOD LEGS ON METAL FRAME. WHEELS ARE Ø11 mm WITH RING PIN, 50mm Ø DOUBLE, MADE OF PLASTIC MATERIAL, IMPORTED FROM TAIWAN.

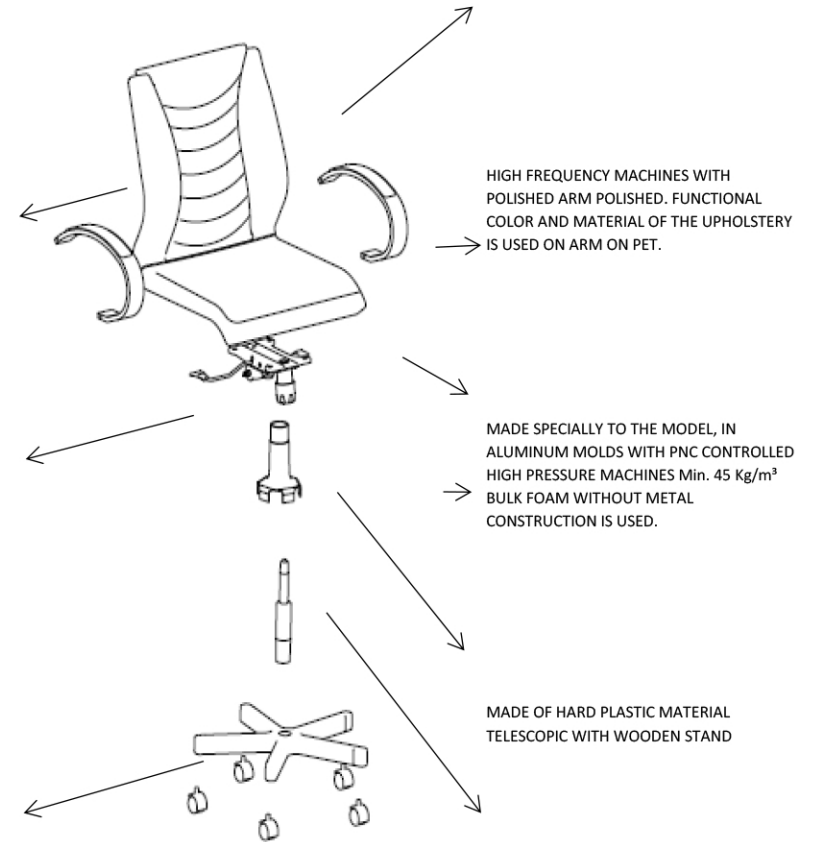

Fabric at least 90% Polyester, at least 210 gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m²

HIGH FREQUENCY MACHINES WITH POLISHED ARM POLISHED. FUNCTIONAL COLOR AND MATERIAL OF THE UPHOLSTERY IS USED ON ARM ON PET.

MADE SPECIALLY TO THE MODEL, IN ALUMINUM MOLDS WITH PNC CONTROLLED HIGH PRESSURE MACHINES Min. 45 Kg/m³ BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

MADE OF HARD PLASTIC MATERIAL TELESCOPIC WITH WOODEN STAND

IMPORTED KLAS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.

ALL VISIBLE METAL PARTS ARE ELECTROSTATIC PAINTED, min. IT IS 40 microns thick.