



DORE 000 C WORK CHAIR




ön görünüş

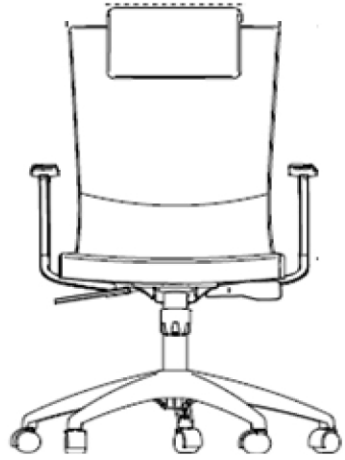

yan görünüş

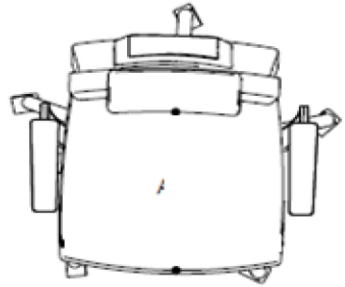

üst görünüş

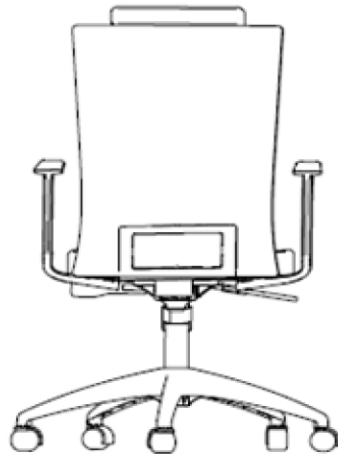

arka görünüş

Seating Depth	: 410mm
Seating Surface Width	: 470mm
Height of Back Upper Edge from Seating Surface	: 740mm
Back Width	: 450mm
Star Foot Diameter	: 700mm
Width	: 590mm
Depth	: 600mm
Height	: 1200mm

ON CAPITAL BOARD Min. 45 Kg/m³ BULK SPONGE USED

BACKBOARD min. ON 11+6 mm FORMED BEEK PLYWOOD Min. 45 Kg/m³ BULK SPONGE IS USED.

BACKGROUND WITH ITS MECHANISMS, SEATS AND BACKS THAT CAN MOVE SIMULTANEOUSLY ABOUT AN AXIS OR CAN MAKE BACK ANGLE ADJUSTMENT (SYNCHRONIZED), AGAINST ANY DEGREE OF ITS BACK ATTITUDE, SEATING LOCATION AND BUTHOUSE APPLICATION CANNOT BE ABLE TO MAKE A POOLITY ENERGY, BAYTONIZENY APARTMENT 3, A POOLITYA ENERGY APARTMENT, A POOLETY, APPROACH, BAYATHENS. SYNCHRONIC MECHANISM WITH SPRING PRESSURE

FIVE STAR FORM POLISHED, OCTOPUS ALUMINUM FOOT. SHOCK ABSORBER HUB FEDER SUPPORT 1.700 Kg ±50 g. .WHEELS ARE Ø11 mm WITH RING PIN, 50mm Ø DOUBLE, MADE OF PLASTIC MATERIAL IMPORTED FROM TAIWAN.SILENT WHEEL IS USED.

Fabric at least 90% Polyester, at least 210 gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m²

ALUMINUM BODY WITH POLYURETHANE PAD ON, FIXED ARM WITH NO DOWN UP MOVEMENT.

MADE SPECIALLY TO THE MODEL, IN ALUMINUM MOLDS WITH PNC CONTROLLED HIGH PRESSURE MACHINES Min. 45 Kg/m³ BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

SEAT BOARD min. ON 11 mm FORMED BEEK PLYWOOD Min. 45 Kg/m³ BULK SPONGE IS USED.

IMPORTED KLAS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.