


TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)							
History		Sequence No.					129
OKAS CODE	39	1	1	3	4	0	0
DMO CATALOG CODE NO							
NAME OF THE PRODUCT	Study Chair						
ORIGINAL PRODUCT CODE (P/N)	DORE 100 PA						
PRODUCT BRAND / MODEL	Goldsit/DORE						
							
TECHNICAL SPECIFICATIONS							
STUDY CHAIR							
Foot Structure	STAR FOOT						
Width (mm)	640						
Depth (mm)	600						
Height (mm)	1060						
Backrest Upholstery Material	FAUX LEATHER / FABRIC						
Foot Material	BLACK POLYPROPYLENE						
Armrest Material	BLACK POLYPROPYLENE						
Other Features	P6 30% FIBER GLASS MATERIAL AND SILENT HARD FLOOR WHEEL IS USED ON PLASTIC FEET.						
For Technical Drawing/Drawing							
Company official name signature and							
DESCRIPTIONS							
Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of							




DORE 100 PA WORK CHAIR



yan görünüş



üst görünüş

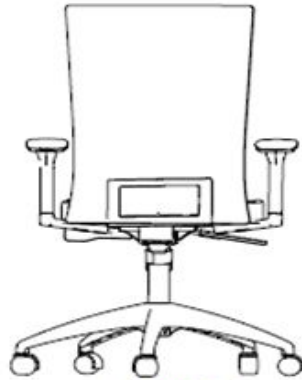

arka görünüş

Seating Depth	: 410mm
Seating Surface Width	: 470mm
Height of Back Upper Edge from Seating Surface	: 600mm
Back Width	: 440mm
Star Foot Diameter	: 700mm
Width	: 640mm
Depth	: 600mm
Height	: 1060mm

BACKBOARD min. ON 11+6 mm FORMED BEEK PLYWOOD Min. 45 Kg/m³ BULK SPONGE IS USED.

BACKGROUND WITH ITS MECHANISMS, SEATS AND BACKS THAT CAN MOVE SIMULTANEOUSLY ABOUT AN AXIS OR CAN MAKE BACK ANGLE ADJUSTMENT (SYNCHRONIZED), AGAINST ANY DEGREE OF ITS BACK ATTITUDE, SEATING LOCATION AND BUTHOUSE APPLICATION CANNOT BE ABLE TO MAKE A POOLITY ENERGY, BAYTONIZENY APARTMENT 3, A POOLITYA ENERGY APARTMENT, A POOLETY, APPROACH, BAYATHENS. SYNCHRONIC MECHANISM WITH SPRING PRESSURE

FIVE STAR FORM NYLON 6 30% GLASS FIBER SHOCK ABSORBER HUB WITH ZAMAK BRACE SUPPORTED 1,600 Kg ±50 g OCTOPUS FOOT. WHEELS Ø11 mm WITH SECOND PIN, 50mm Ø DUBLE DUBLERE DUPLATILE MALLERZE.

METAL PARTS MIN. 40 micron THICKNESS, ELECTROSTATIC PAINTED.

Fabric at least 90% Polyester, at least 210 gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m²

PP COPOLYMER AND PA 6 30% GLASS FIBER PLASTIC MATERIAL WITH ADJUSTABLE HEIGHT, ARMO PLASTIC MATERIAL (INTERIOR PLASTIC FRAME AND FOAM) AND HORIZONTAL RIGHT-LEFT AND ENEŞEKOL EAKEN KEREKAYA DAKENDA.

MADE SPECIALLY TO THE MODEL, IN ALUMINUM MOLDS WITH PNC CONTROLLED HIGH PRESSURE MACHINES Min. 45 Kg/m³ BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

SEAT BOARD min. ON 11 mm FORMED BEEK PLYWOOD Min. 45 Kg/m³ BULK SPONGE IS USED.

IMPORTED KLAS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.