


TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)							
History		Sequence No.					247
OKAS CODE	39	1	1	3	4	0	0
DMO CATALOG CODE NO							
NAME OF THE PRODUCT	Study Chair						
ORIGINAL PRODUCT CODE (P/N)	FOX 100 CA						
PRODUCT BRAND / MODEL	Goldsit/FOX						
							
TECHNICAL SPECIFICATIONS							
STUDY CHAIR							
Foot Structure	STAR FOOT						
Width (mm)	610						
Depth (mm)	570						
Height (mm)	1050						
Backrest Upholstery Material	NET FABRIC						
Foot Material	ALUMINUM INJECTION						
Armrest Material	METAL AND BLACK POLYPROPYLENE						
Other Features	USES SILENT HARD FLOOR WHEEL.						
For Technical Drawing/Drawing							
Company official name signature and							
DESCRIPTIONS							
Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of							



FOX 100 CA WORK CHAIR

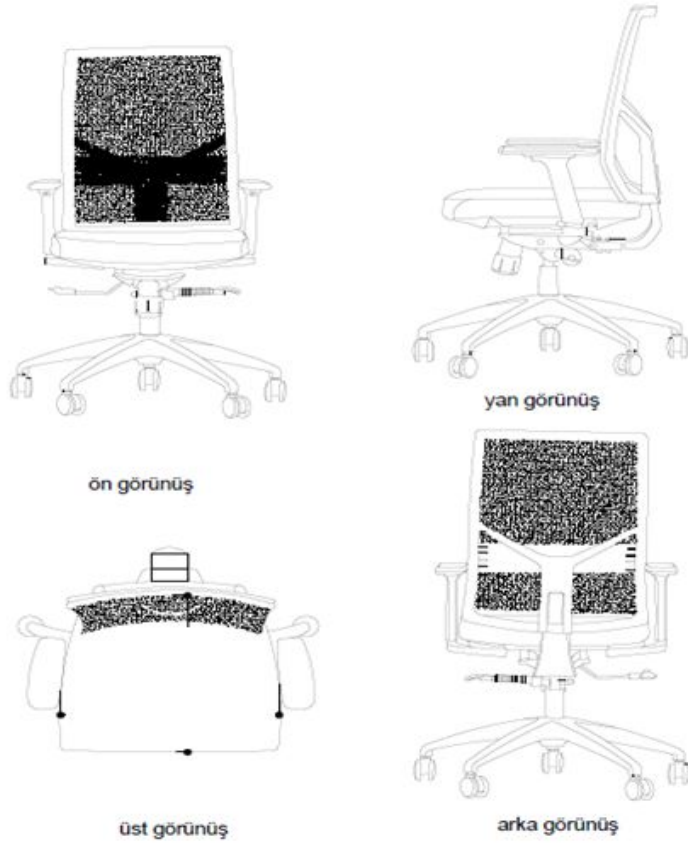

Seating Depth	: 430mm
Seating Surface Width	: 490mm
Height of Back Upper Edge from Seating Surface	: 610mm
Back Width	: 450mm
Star Foot Diameter	: 700mm
Width	: 610mm
Depth	: 570mm
Height	: 1050mm

THE BACK IS PLASTIC AND WITH MESH. THE OUTER PLASTIC MATERIAL OF THE BACK IS MADE OF NYLON 6 30% GLASS FIBER PLASTIC. IT HAS MOVABLE WAIST SUPPORT. BACK GROUP UP AND DOWN MOVEMENT CAN BE MADE WITH THE ASSIST OF LATCH ON THE REAR

MECHANISM, SEAT, FIXED AND BACK WITH MOVING AROUND AN AXIS OR CAN ADJUST BACK BACK, ARM AND BUTTON, CAN LOCK IN AT LEAST 3 POSITIONS WITH THE HELP OF BACK, ARM AND BUTTON AND CAN LOCK IN MINIMUM 3 POSITION.

FIVE STAR FORM POLISHED, OCTOPUS ALUMINUM FOOT. SHOCK ABSORBER HUB FEDER SUPPORT 1.700 Kg $\pm$ 50 g. .WHEELS ARE $\varnothing$ 11 mm WITH RING PIN, 50mm $\varnothing$ DOUBLE, MADE OF PLASTIC MATERIAL IMPORTED FROM TAIWAN.SILENT WHEEL IS USED.

METAL PARTS MIN. 40 micron THICKNESS, ELECTROSTATIC PAINTED AND POLISHED.

Fabric at least 90% Polyester, at least 210 gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m²

PP COPOLIMER PLASTIC AND METAL OVAL PIPE MATERIAL NICKELATED HEIGHT ADJUSTABLE, ARMRESTS WITH POLYURETHANE (INTERIOR PLASTIC FRAME).

MADE SPECIALLY TO THE MODEL, IN ALUMINUM MOLDS WITH PNC CONTROLLED HIGH PRESSURE MACHINES Min. 45 Kg/m³ BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

SEAT CARRIER MADE FROM PP COPOLYMER PLASTIC

IMPORTED KLAS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.