
TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)							
History					Se	equence No.	246
OKAS CODE	39	1	1	3	4	0	0
DMO CATALOG CODE NO							
NAME OF THE PRODUCT	Study Chair						
ORIGINAL PRODUCT CODE (P/N)	FOX 100 PA						
PRODUCT BRAND / MODEL	Goldsit/FOX						




TECHNICIAL SPECIFICATIONS						
STUDY CHAIR						
Foot Structure	STAR FOOT					
Width (mm)	610					
Depth (mm)	570					
Height (mm)	1060					
Backrest Upholstery Material	NET FABRIC					
Foot Material	BLACK POLYPROPYLENE					
Armrest Material	BLACK POLYPROPYLENE					
	P6 30% FIBER GLASS MATERIAL AND SILENT HARD FLOOR WHEEL IS USED ON					
Other Features	PLASTIC FEET.					
For Technical Drawing/Drawing						
Company official name signature and	d					
DESCRIPTIONS	•					

Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of

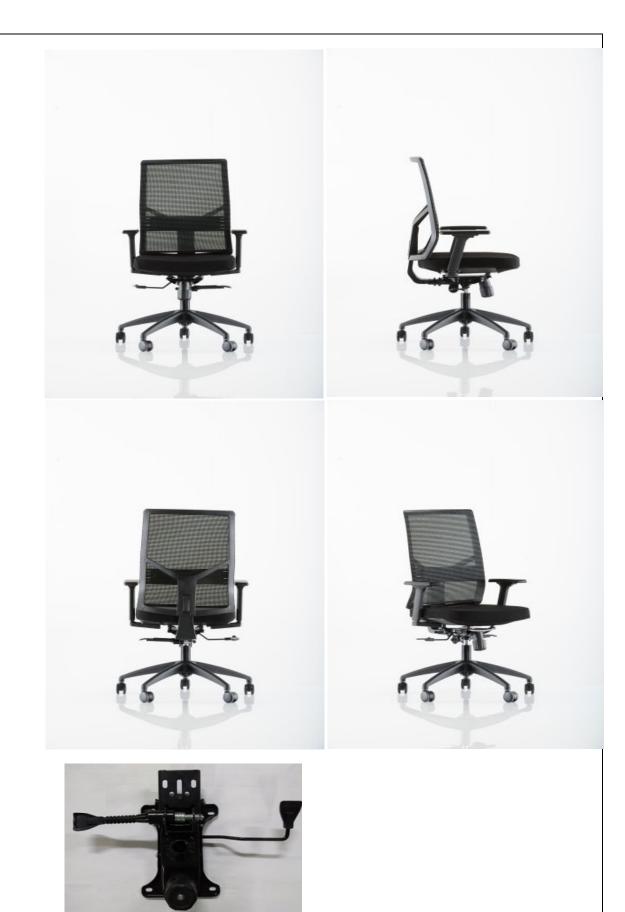

FOX 100 PA WORK CHAIR

Fabric at least 90% Polyester, at least 210

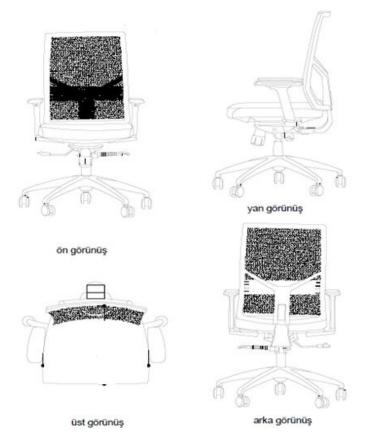

Seating Depth : 430mm Seating Surface Width : 490mm Height of Back Upper Edge from Seating Surface : 610mm : 450mm Back Width : 700mm Star Foot Diameter : 610mm Width : 570mm Depth Height : 1060mm

gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m² THE BACK IS PLASTIC AND WITH MESH. THE PP COPOLIMER PLASTIC MATERIAL, HEIGHT OUTER PLASTIC MATERIAL OF THE BACK IS ADJUSTABLE, ARMRESTS WITH MADE OF NYLON 6 30% GLASS FIBER POLYURETHANE MATERIAL (INTERIOR PLASTIC. IT HAS MOVABLE WAIST SUPPORT. WITH PLASTIC FRAME). BACK GROUP UP AND DOWN MOVEMENT CAN BE MADE WITH THE ASSIST OF LATCH ON THE REAR MADE SPECIALLY TO THE MODEL, IN ALUMINUM MOLDS WITH PNC MECHANISM, SEAT, FIXED AND BACK WITH CONTROLLED HIGH PRESSURE MACHINES MOVING AROUND AN AXIS OR CAN ADJUST Min. 45 Kg/m³ BULK FOAM WITHOUT BACK BACK, ARM AND BUTTON, CAN LOCK METAL CONSTRUCTION IS USED. IN AT LEAST 3 POSITIONS WITH THE HELP OF BACK, ARM AND BUTTON AND CAN LOCK IN MINIMUM 3 POSITION. SEAT CARRIER MADE FROM PP COPOLYMER PLASTIC FIVE STAR FORM NYLON 6 30% GLASS FIBER SHOCK ABSORBER HUB WITH ZAMAK BRACE SUPPORTED 1,600 Kg ±50 g OCTOPUS FOOT.WHEELS Ø11 mm WITH IMPORTED KLASS 4 SHOCK ABSORBER IS SECOND PIN, 50mm Ø DUBLE DUBLERE METAL PARTS ARE ELECTROSTATIC PAINTED USED THAT CAN TURN IN 360° ON ITS AXIS. DUPLATILE MALLERZE. AND min. IT IS 40 microns thick.