

TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)

History		Sequence No.					186
OKAS CODE	39	1	1	3	4	0	0

DMO CATALOG CODE NO	
NAME OF THE PRODUCT	Study Chair
ORIGINAL PRODUCT CODE (P/N)	JUPITER 000 GPA
PRODUCT BRAND / MODEL	Goldsit/JUPITER



TECHNICAL SPECIFICATIONS

STUDY CHAIR

Foot Structure	STAR FOOT
Width (mm)	610-650
Depth (mm)	600
Height (mm)	1230
Backrest Upholstery Material	NET FABRIC
Foot Material	COLOR POLYPROPYLENE (EXCEPT BLACK)
Armrest Material	COLOR POLYPROPYLENE
Other Features	P6 30% FIBER GLASS MATERIAL AND SILENT HARD FLOOR WHEEL IS USED ON PLASTIC FEET.

[For Technical Drawing/Drawing](#)


Company official name signature and

DESCRIPTIONS


Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of



JUPITER 000 GPA STUDY CHAIR




ön görünüş



yan görünüş



üst görünüş



arka görünüş

IT HAS ADJUSTABLE HEIGHT, MOVING HEAD UP AND DOWN ON SINGLE AXIS. HEAD CARRIER IS PLASTIC MATERIAL, MADE SPECIALLY FOR THE MODEL, Min. 45 Kg/m³ BULK WITH FOAM AND FLOOR.

THE BACK IS COLOR GRAY PLASTIC AND WITH MESH. IT HAS PLASTIC MOVABLE WAIST SUPPORT.

BACK SEAT AND BACK SEAT AGAINST ANY DEGREE OF ITS BACK ATTITUDE, CAN MAKE A SEAT AGAINST ANY DEGREE OF ITS BACK ATTITUDE, CAN BE MADE AT THE POOL AND BREAK, APPROACH, APPROPRIATE, BREAKTHE, BREAKEN, BREAKEN, BREAK, BREAKEN, BREAK, APARTMENT AND TAIL SYNCHRONIC MECHANISM WITH SPRING PRESSURE ADJUSTMENT ACCORDING TO INDIVIDUAL WEIGHTS.

FIVE STAR FORM COLORED NYLON 6 30% GLASS FIBER SHOCK ABSORBER SUPPORT WITH ZAMAK BRACELET WEIGHT 1,600 Kg ±50 g OCTOPUS FOOT.WHEELS Ø11 mm WITH SEGMENT PIM, 50mm Ø DUPELZILERI TEKHILLERI TEKHILLER.


Fabric at least 90% Polyester, at least 210 gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m²

PP COPOLYMER AND PA 6 30% GLASS FIBER COLORED PLASTIC MATERIAL WITH ADJUSTABLE HEIGHT, ARMO PLASTIC MATERIAL (INTERIOR PLASTIC FRAME AND FOAM) WITH ADJUSTABLE HEIGHT.

HIGH PRESSURE MACHINES WITH PLC CONTROL IN ALUMINUM MOLDS MADE SPECIALLY TO THE MODEL Min. 45 Kg/m³ BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

SEAT IS COLORED PP COPOLYMER PLASTIC MATERIAL AND SPECIALLY WORKED ON THE MODEL.

IMPORTED KLAS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.

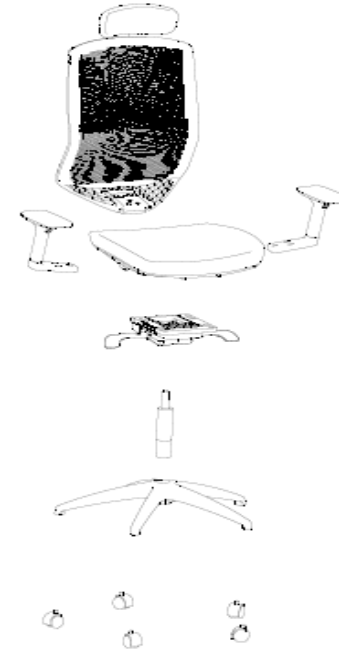

METAL PARTS MIN. 40 micron THICKNESS, ELECTROSTATIC PAINTED.

A- Seating Depth	: 450-500mm
B- Seating Surface Width	: 500mm
C- Height of Upper Back Edge from Seating Surface	: 740mm
D- Back Width	: 430mm
TO- Star Foot Diameter	: 700mm
Width	: 610 -650 mm
Depth	: 600mm
Height	: 1230mm