

TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)

| | | | | | | | |
|-----------|----|--------------|---|---|---|---|-----|
| History | | Sequence No. | | | | | 134 |
| OKAS CODE | 39 | 1 | 1 | 3 | 4 | 0 | 0 |

| | |
|-----------------------------|---------------|
| DMO CATALOG CODE NO | |
| NAME OF THE PRODUCT | Study Chair |
| ORIGINAL PRODUCT CODE (P/N) | LUCCA 000 C |
| PRODUCT BRAND / MODEL | Goldsit/LUCCA |



TECHNICAL SPECIFICATIONS

STUDY CHAIR

| | |
|---|--|
| Foot Structure | STAR FOOT |
| Width (mm) | 570 |
| Depth (mm) | 670 |
| Height (mm) | 1180 |
| Backrest Upholstery Material | FAUX LEATHER / FABRIC |
| Foot Material | ALUMINUM INJECTION |
| Armrest Material | POLISHED ALUMINUM |
| Other Features | SILENT FLOOR WHEEL IS USED ON STAR FEET. |
| For Technical Drawing/Drawing | |

| | |
|-------------------------------------|--|
| Company official name signature and | |
|-------------------------------------|--|

DESCRIPTIONS
 Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of




LUCCA 000 C WORK CHAIR




ön görünüş



yan görünüş



üst görünüş

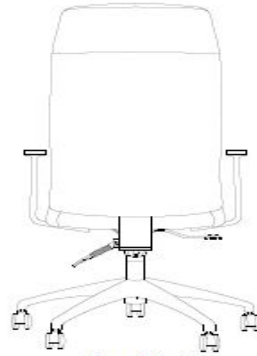


arka görünüş

| | |
|--|----------|
| Seating Depth | : 460mm |
| Seating Surface Width | : 470mm |
| Height of Back Upper Edge from Seating Surface | : 730mm |
| Back Width | : 450mm |
| Star Foot Diameter | : 700mm |
| Width | : 570mm |
| Depth | : 670mm |
| Height | : 1180mm |

BACKBOARD min. ON 11+6 mm FORMED BEEK PLYWOOD Min. 45 Kg/m³ BULK SPONGE IS USED.

SINGLE VISIONARY MERCEDES-BENZ AQUARIC GRINDING, CAN LOCK IN AT LEAST 3 POSITIONS WITH THE HELP OF ARM AND BUTTON AND SINGLE VISUAL MERCURIZATION AYAZAZATIC MECHANISM.

FIVE STAR FORM POLISHED, OCTOPUS ALUMINUM FOOT. SHOCK ABSORBER HUB FEDER SUPPORT 1.700 Kg ±50 g. .WHEELS ARE Ø11 mm WITH RING PIN, 50mm Ø DOUBLE, MADE OF PLASTIC MATERIAL IMPORTED FROM TAIWAN.SILENT WHEEL IS USED.

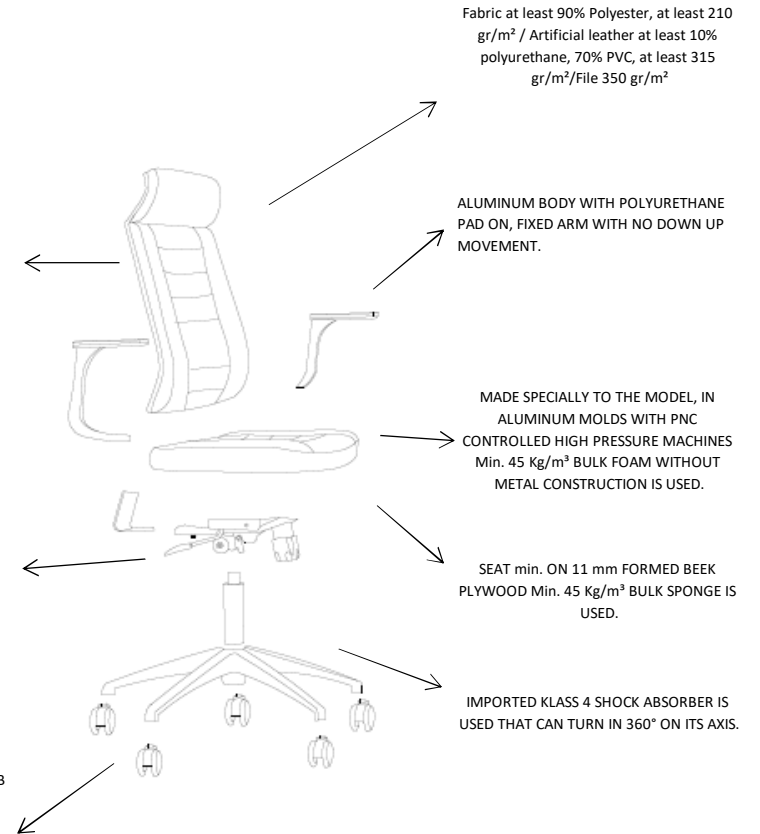

Fabric at least 90% Polyester, at least 210 gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m²

ALUMINUM BODY WITH POLYURETHANE PAD ON, FIXED ARM WITH NO DOWN UP MOVEMENT.

MADE SPECIALLY TO THE MODEL, IN ALUMINUM MOLDS WITH PNC CONTROLLED HIGH PRESSURE MACHINES Min. 45 Kg/m³ BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

SEAT min. ON 11 mm FORMED BEEK PLYWOOD Min. 45 Kg/m³ BULK SPONGE IS USED.

IMPORTED KLAS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.

METAL PARTS MIN. 40 micron THICKNESS, ELECTROSTATIC PAINTED AND POLISHED.