


TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)							
History		Sequence No.					105
OKAS CODE	39	1	1	3	4	0	0
DMO CATALOG CODE NO							
NAME OF THE PRODUCT	Study Chair						
ORIGINAL PRODUCT CODE (P/N)	MOROCCO 000 PA						
PRODUCT BRAND / MODEL	Goldsit/MOROCCO						
							
TECHNICAL SPECIFICATIONS							
STUDY CHAIR							
Foot Structure	STAR FOOT						
Width (mm)	690						
Depth (mm)	600						
Height (mm)	1210						
Backrest Upholstery Material	FAUX LEATHER / FABRIC						
Foot Material	BLACK POLYPROPYLENE						
Armrest Material	BLACK POLYPROPYLENE						
Other Features							
For Technical Drawing/Drawing							
Company official name signature and							
DESCRIPTIONS							
Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of							



MOROCCO 000 PA WORK CHAIR

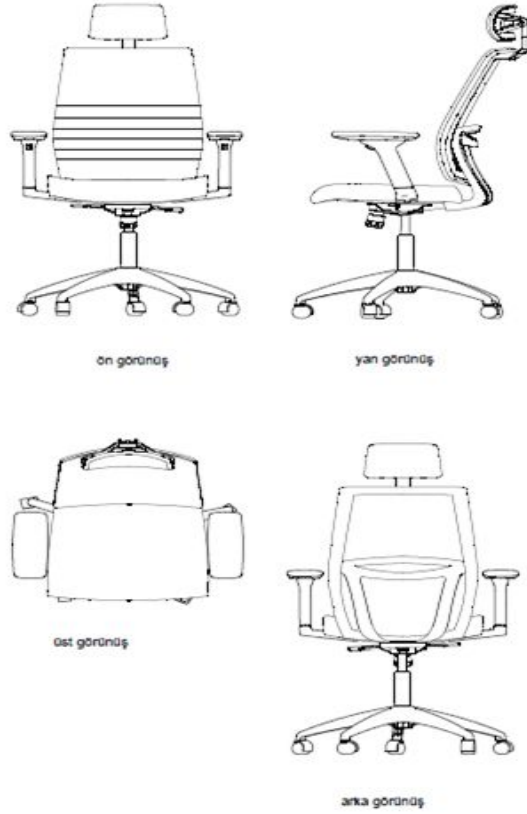

IT HAS AN ADJUSTABLE HEIGHT AND MOVABLE HEAD ON SINGLE AXIS. THE HEAD CARRIER IS UPPER AND INNER PP COPOLYMER PLASTIC MADE ON THE MODEL, SPECIALLY MANUFACTURED AND LEATHER.

THE BACK IS PLASTIC AND LEATHER UPLOADED. IT HAS PLASTIC MOVABLE WAIST SUPPORT.

BACKGROUND WITH ITS MECHANISMS, SEATS AND BACKS THAT CAN MOVE SIMULTANEOUSLY ABOUT AN AXIS OR CAN MAKE BACK ANGLE ADJUSTMENT (SYNCHRONIZED), AGAINST ANY DEGREE OF ITS BACK ATTITUDE, SEATING LOCATION AND BUTHOUSE APPLICATION CANNOT BE ABLE TO MAKE A POOLITY ENERGY, BAYTONIZENY APARTMENT 3, A POOLITYA ENERGY APARTMENT, A POOLETY, APPROACH, BAYATHENS. SYNCHRONIC MECHANISM WITH SPRING PRESSURE

FIVE STAR FORM NYLON 6 30% GLASS FIBER SHOCK ABSORBER HUB WITH ZAMAK BRACE SUPPORTED 1,600 Kg $\pm$ 50 g OCTOPUS FOOT.WHEELS $\varnothing$ 11 mm WITH SECOND PIN, 50mm $\varnothing$ DUBLE DUBLERE DUPLATILE MALLERZE.

Fabric at least 90% Polyester, at least 210 gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m²

PP COPOLIMER AND PA 6 30% GLASS FIBER PLASTIC MATERIAL WITH ADJUSTABLE HEIGHT, ARMO PLASTIC MATERIAL (INTERIOR PLASTIC FRAME AND FOAM) AND HORIZONTAL RIGHT-LEFT AND EKEKEN KEREKEYOL EAKEN-LEFT VEAKABLE.

HIGH PRESSURE MACHINES WITH PLC CONTROL IN ALUMINUM MOLDS MADE SPECIALLY TO THE MODEL Min. 45 Kg/m³ BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

SEAT MIN. IT CONSISTS OF BEEKEEN PAPE FORM FORM WITH 11 mm THICKNESS.

IMPORTED KLAS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.

METAL PARTS MIN. 40 micron THICKNESS, ELECTROSTATIC PAINTED.

Seating Depth	: 420mm
Seating Surface Width	: 510mm
Height of Back Upper Edge from Seating Surface	: 740mm
Back Width	: 470mm
Star Foot Diameter	: 700mm
Width	: 690mm
Depth	: 600mm
Height	: 1210mm