

TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)							
History	Sequence No.						103
OKAS CODE	39	1	1	3	4	0	0
DMO CATALOG CODE NO							
NAME OF THE PRODUCT	Study Chair						
ORIGINAL PRODUCT CODE (P/N)	MOROCCO 100 C						
PRODUCT BRAND / MODEL	Goldsit/MOROCCO						
							
TECHNICAL SPECIFICATIONS							
STUDY CHAIR							
Foot Structure	STAR FOOT						
Width (mm)	620						
Depth (mm)	600						
Height (mm)	1040						
Backrest Upholstery Material	FAUX LEATHER / FABRIC						
Foot Material	ALUMINUM INJECTION						
Armrest Material	POLISHED ALUMINUM						
Other Features							
For Technical Drawing/Drawing							
Company official name signature and							
DESCRIPTIONS							
Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of							



MOROCCO 100 C WORK CHAIR



ön görünüş

yan görünüş



üst görünüş




arka görünüş

THE BACK IS PLASTIC AND LEATHER
UPLOADED. IT HAS PLASTIC MOVABLE
WAIST SUPPORT.

BACKGROUND WITH ITS MECHANISMS,
SEATS AND BACKS THAT CAN MOVE
SIMULTANEOUSLY ABOUT AN AXIS OR CAN
MAKE BACK ANGLE ADJUSTMENT
(SYNCHRONIZED), AGAINST ANY DEGREE
OF ITS BACK ATTITUDE, SEATING LOCATION
AND BUTHOUSE APPLICATION CANNOT BE
ABLE TO MAKE A POOLITY ENERGY,
BAYTONIZENY APARTMENT 3, A POOLITYA
ENERGY APARTMENT, A POOLETY,
APPROACH, BAYATHENS. SYNCHRONIC
MECHANISM WITH SPRING PRESSURE

FIVE STAR FORM POLISHED, OCTOPUS
ALUMINUM FOOT. SHOCK ABSORBER HUB
FEDER SUPPORT 1.700 Kg $\pm$ 50 g. .WHEELS
ARE $\varnothing$ 11 mm WITH RING PIN, 50mm $\varnothing$
DOUBLE, MADE OF PLASTIC MATERIAL
IMPORTED FROM TAIWAN.SILENT WHEEL
IS USED.

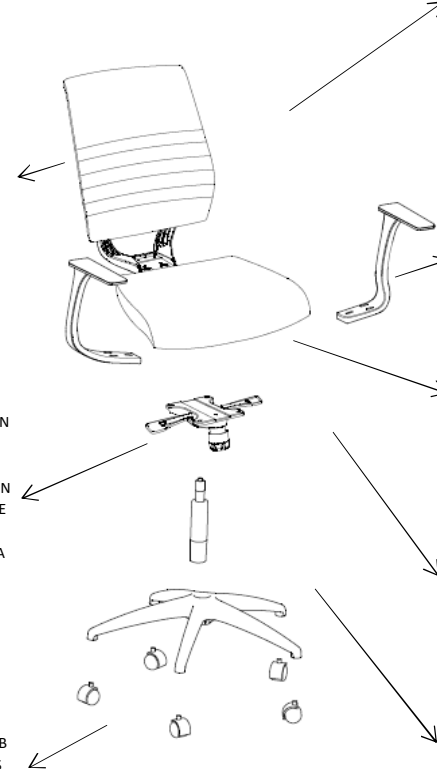

Fabric at least 90% Polyester, at least 210
gr/m² / Artificial leather at least 10%
polyurethane, 70% PVC, at least 315
gr/m²/File 350 gr/m²

ALUMINUM BODY WITH POLYURETHANE
PAD ON, FIXED ARM WITH NO DOWN UP
MOVEMENT.

HIGH PRESSURE MACHINES WITH PLC
CONTROL IN ALUMINUM MOLDS MADE
SPECIALLY TO THE MODEL Min. 45 Kg/m³
BULK FOAM WITHOUT METAL
CONSTRUCTION IS USED.

SEAT MIN. IT CONSISTS OF BEEKEEN PAPE
FORM FORM WITH 11 mm THICKNESS.

IMPORTED KLAS 4 SHOCK ABSORBER IS
USED THAT CAN TURN IN 360° ON ITS AXIS.

METAL PARTS MIN. 40 micron THICKNESS,
ELECTROSTATIC PAINTED AND POLISHED.

Seating Depth	: 420mm
Seating Surface Width	: 510mm
Height of Back Upper Edge from Seating Surface	: 580mm
Back Width	: 470mm
Star Foot Diameter	: 700mm
Width	: 620mm
Depth	: 600mm
Height	:1040mm