

TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)							
History		Sequence No.					106
OKAS CODE	39	1	1	3	4	0	0
DMO CATALOG CODE NO							
NAME OF THE PRODUCT	Study Chair						
ORIGINAL PRODUCT CODE (P/N)	MOROCOCO 100 PA						
PRODUCT BRAND / MODEL	Goldsit/MOROCCO						
							
TECHNICAL SPECIFICATIONS							
STUDY CHAIR							
Foot Structure	STAR FOOT						
Width (mm)	690						
Depth (mm)	600						
Height (mm)	1050						
Backrest Upholstery Material	FAUX LEATHER / FABRIC						
Foot Material	BLACK POLYPROPYLENE						
Armrest Material	BLACK POLYPROPYLENE						
Other Features							
For Technical Drawing/Drawing							
Company official name signature and							
DESCRIPTIONS							
Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of							



MOROCCO 100 PA WORK CHAIR



ön görünüş

yan görünüş



üst görünüş




arka görünüş

Seating Depth	: 420mm
Seating Surface Width	: 510mm
Height of Back Upper Edge from Seating Surface	: 580mm
Back Width	: 470mm
Star Foot Diameter	: 700mm
Width	: 690mm
Depth	: 600mm
Height	: 1050mm

THE BACK IS PLASTIC AND LEATHER
UPLOADED. IT HAS PLASTIC MOVABLE
WAIST SUPPORT.

BACKGROUND WITH ITS MECHANISMS,
SEATS AND BACKS THAT CAN MOVE
SIMULTANEOUSLY ABOUT AN AXIS OR CAN
MAKE BACK ANGLE ADJUSTMENT
(SYNCHRONIZED), AGAINST ANY DEGREE
OF ITS BACK ATTITUDE, SEATING LOCATION
AND BUTHOUSE APPLICATION CANNOT BE
ABLE TO MAKE A POOLITY ENERGY,
BAYTONIZENY APARTMENT 3, A POOLITYA
ENERGY APARTMENT, A POOLETY,
APPROACH, BAYATHENS. SYNCHRONIC
MECHANISM WITH SPRING PRESSURE

FIVE STAR FORM NYLON 6 30% GLASS
FIBER SHOCK ABSORBER HUB WITH ZAMAK
BRACE SUPPORTED 1,600 Kg $\pm$ 50 g
OCTOPUS FOOT. WHEELS $\varnothing$ 11 mm WITH
SECOND PIN, 50mm $\varnothing$ DUBLE DUBLERE
DUPLATILE MALLERZE.

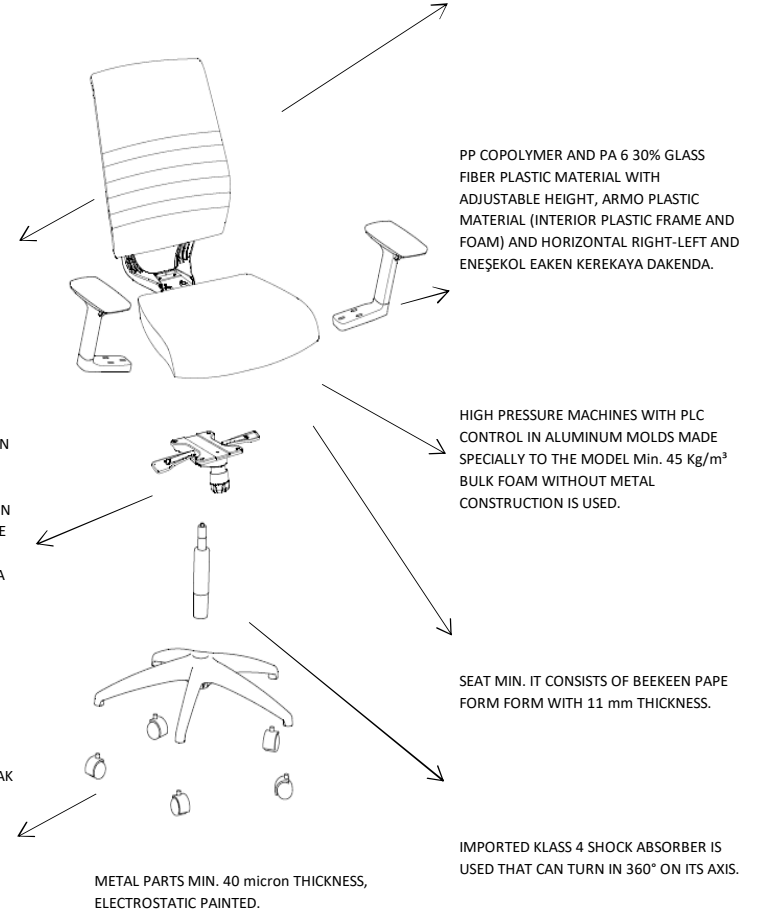

Fabric at least 90% Polyester, at least 210
gr/m² / Artificial leather at least 10%
polyurethane, 70% PVC, at least 315
gr/m²/File 350 gr/m²

PP COPOLYMER AND PA 6 30% GLASS
FIBER PLASTIC MATERIAL WITH
ADJUSTABLE HEIGHT, ARMO PLASTIC
MATERIAL (INTERIOR PLASTIC FRAME AND
FOAM) AND HORIZONTAL RIGHT-LEFT AND
ENEŞEKOL EAKEN KEREKAYA DAKENDA.

HIGH PRESSURE MACHINES WITH PLC
CONTROL IN ALUMINUM MOLDS MADE
SPECIALLY TO THE MODEL Min. 45 Kg/m³
BULK FOAM WITHOUT METAL
CONSTRUCTION IS USED.

SEAT MIN. IT CONSISTS OF BEEKEEN PAPE
FORM FORM WITH 11 mm THICKNESS.

IMPORTED KLAS 4 SHOCK ABSORBER IS
USED THAT CAN TURN IN 360° ON ITS AXIS.

METAL PARTS MIN. 40 micron THICKNESS,
ELECTROSTATIC PAINTED.