


## PAROX 000 T WORK CHAIR




ön görünüş



yan görünüş

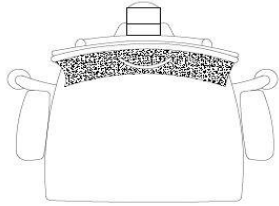

üst görünüş

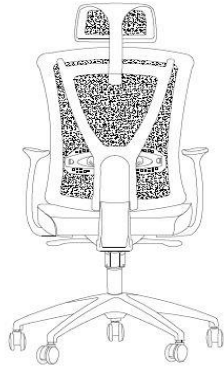


arka görünüş

THERE IS A MOVING HEAD WITH ADJUSTABLE HEIGHT. THE HEAD CARRIER IS PLASTIC MADE ON THE INSIDE AND EXTERIOR WITH MESH.

THE BACK IS PLASTIC AND WITH MESH. IT HAS PLASTIC FIXED WAIST SUPPORT.

SINGLE VISIONARY MERCEDES-BENZ AQUARIC GRINDING, CAN LOCK IN AT LEAST 3 POSITIONS WITH THE HELP OF ARM AND BUTTON AND SINGLE VISUAL VISUAL MERCURIZATION AYAZATIC MECHANISM.

FIVE STAR FORM NYLON 6 30% GLASS FIBER SHOCK ABSORBER HUB WITH ZAMAK BRACE SUPPORTED 1,600 Kg ±50 g OCTOPUS FOOT.WHEELS Ø11 mm WITH SECOND PIN, 50mm Ø DUBLE DUBLERE DUPLATILE MALLERZE.

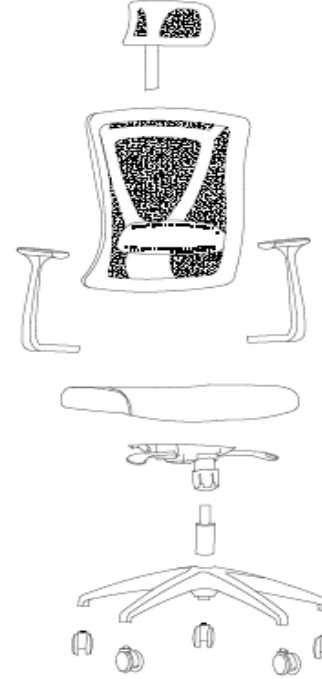

Fabric at least 90% Polyester, at least 210 gr/m<sup>2</sup> / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m<sup>2</sup>/File 350 gr/m<sup>2</sup>

PP COPOLYMER PLASTIC ARMREST, THERE IS NO FUNCTIONAL MOVEMENT OF THE ARMS, DOWN UP, RIGHT LEFT.

HIGH PRESSURE MACHINES WITH PLC CONTROL IN ALUMINUM MOLDS MADE SPECIALLY TO THE MODEL Min. 45 Kg/m<sup>3</sup> BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

SEAT MIN. IT CONSISTS OF BEEKEEN PAPE FORM FORM WITH 11 mm THICKNESS. THE BOTTOM OF THE SEAT HAS A PP MATERIAL PLASTIC COVER.

METAL PARTS ARE ELECTROSTATIC PAINTED AND min. IT IS 40 microns thick.

IMPORTED KLAS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.

Seating Depth	: 410mm
Seating Surface Width	: 480mm
Height of Back Upper Edge from Seating Surface	: 700mm
Back Width	: 490mm
Star Foot Diameter	: 700mm
Width	: 610mm
Depth	: 650mm
Height	: 1150mm