

TECHNICAL SPECIFICATION FORM OF THE PRODUCT (ANNEX-4)

History		Sequence No.					284
OKAS CODE	39	1	1	3	4	0	0

DMO CATALOG CODE NO	
NAME OF THE PRODUCT	Study Chair
ORIGINAL PRODUCT CODE (P/N)	PAROX 100 CA
PRODUCT BRAND / MODEL	Goldsit/PAROX



TECHNICAL SPECIFICATIONS

STUDY CHAIR


Foot Structure	STAR FOOT
Width (mm)	620
Depth (mm)	670
Height (mm)	1020
Backrest Upholstery Material	NET FABRIC
Foot Material	ALUMINUM INJECTION
Armrest Material	METAL AND BLACK POLYPROPYLENE
Other Features	USES SILENT HARD FLOOR WHEEL.
For Technical Drawing/Drawing	

Company official name signature and	
-------------------------------------	--

DESCRIPTIONS
Annex-4 Technical Specification Forms for the Product shall be filled in accordance with the "General Rules" in the "List of




PAROX 100 CA WORK CHAIR

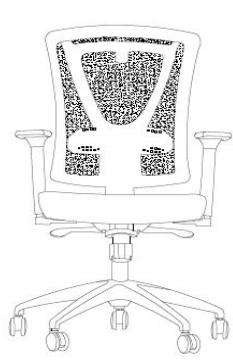


ön görünüş



yan görünüş



üst görünüş



arka görünüş

Seating Depth	: 410mm
Seating Surface Width	: 480mm
Height of Back Upper Edge from Seating Surface	: 580mm
Back Width	: 490mm
Star Foot Diameter	: 700mm
Width	: 620mm
Depth	: 670mm
Height	: 1020mm

THE BACK IS PLASTIC AND WITH MESH. IT HAS PLASTIC FIXED WAIST SUPPORT.

SINGLE VISIONARY MERCEDES-BENZ AQUARIC GRINDING, CAN LOCK IN AT LEAST 3 POSITIONS WITH THE HELP OF ARM AND BUTTON AND SINGLE VISUAL VISUAL MERCURIZATION AYAZATIC MECHANISM.

FIVE STAR FORM POLISHED, OCTOPUS ALUMINUM FOOT. SHOCK ABSORBER HUB FEDER SUPPORT 1.700 Kg \pm 50 g. .WHEELS ARE \varnothing 11 mm WITH RING PIN, 50mm \varnothing DOUBLE, MADE OF PLASTIC MATERIAL IMPORTED FROM TAIWAN.SILENT WHEEL IS USED.

Fabric at least 90% Polyester, at least 210 gr/m² / Artificial leather at least 10% polyurethane, 70% PVC, at least 315 gr/m²/File 350 gr/m²

PP COPOLIMER PLASTIC AND METAL OVAL PIPE MATERIAL NICKELATED HEIGHT ADJUSTABLE, ARMRESTS WITH POLYURETHANE (INTERIOR PLASTIC FRAME).

HIGH PRESSURE MACHINES WITH PLC CONTROL IN ALUMINUM MOLDS MADE SPECIALLY TO THE MODEL Min. 45 Kg/m³ BULK FOAM WITHOUT METAL CONSTRUCTION IS USED.

SEAT MIN. IT CONSISTS OF BEEKEN PAPE FORM FORM WITH 11 mm THICKNESS. THE BOTTOM OF THE SEAT HAS A PP MATERIAL PLASTIC COVER.

IMPORTED CLASS 4 SHOCK ABSORBER IS USED THAT CAN TURN IN 360° ON ITS AXIS.