


KUBIKA



Complete range of operative and visitor chairs with high or low back.

Seat: in curved beech-poplar plywood – thickness 12 mm.
Backrest: in reinforced nylon.
Covers: backrest and seat have black or light grey polypropylene covers

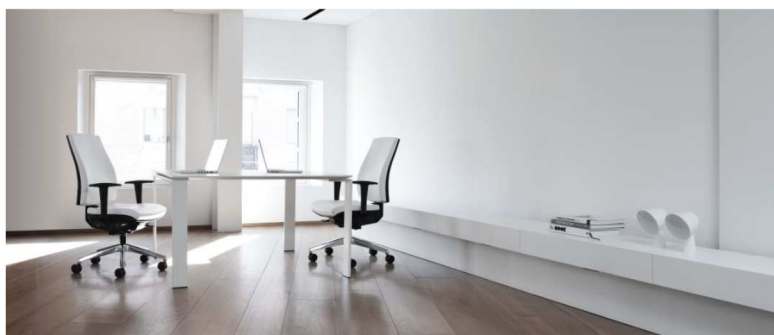

Filler: in expanded non-deformable polyurethane

- Density 65 kg/m³ seat medium thickness 50 mm
- Density 55 kg/m³ back medium thickness 50 mm

Arms:



Fixed arms with internal steel structure covered with injection of expanded polyurethane.



3D Adjustable, rotating and sliding black arms: in black nylon with upper part in black soft polyurethane **adjustable in height** for 7,5 cm with 7 locking positions, **rotating and stretchable** for 5 cm



2D adjustable in black nylon: adjustable in height and extensible, matching with the backrest color



2D adjustable in grey nylon: adjustable in height and extensible, matching with the backrest color



2D Adjustable and stretchable: in black nylon with upper part in black soft polyurethane **adjustable in height** for 8 cm through control handle with 8 locking positions and **stretchable** for 6 cm



Fixed arms in black nylon (only for versions gas and gas + self-adjusting synchron mechanisms)

Lumbar support: integrated adjustable lumbar support fixed between backrest structure and filler (for all versions)




Mechanisms:

- **Fixed plate:** (for fixed version) in painted steel thickness 2.5, cone \varnothing 28 mm.
- **synchron mechanism:**
 - 6 locking/ unlocking positions (anti-shock) with automatic return system
 - tension synchronized tilting adjusting by lateral crank
 - lever for seat elevation



- **Self weighing Synchron (RE):** lockable in 5 positions and with anti-shock system. Backrest maximum reach 20°, seat maximum reach 6°. Tilting self-weighing system according to the users' weight.

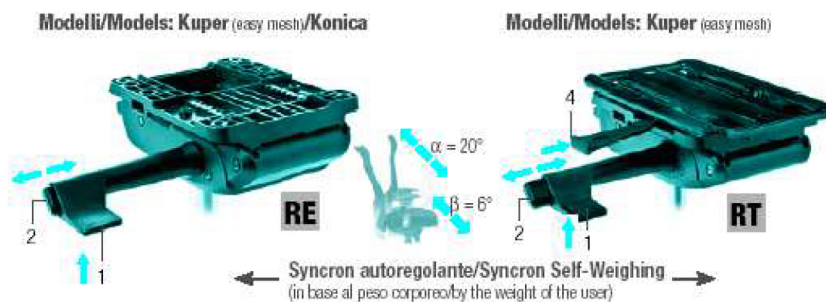

- **Self weighing Synchron with sliding system (RT):** lockable in 5 positions and with anti-shock system. Backrest maximum reach 20°, seat maximum reach 6°. Tilting self-weighing system according to the users' weight, 60 mm seat depth adjustment through sliding plate.

Swivel bases and castors:



APN 5 star base with steel inner frame 25x30 mm th.2 m \varnothing 670 mm, cover in black polypropylene. (Ansi-Bifma X5.1-1993/8)



AL7 5-star base in die-cast polished aluminum \varnothing 650 mm



for **APN e AL7**: self-braking soft castors \varnothing 50 mm



APS 5-star base in black reinforced nylon \varnothing 660 mm



AL6 5-star base in die-cast polished aluminum \varnothing 654 mm.



APG 5-star base in grey nylon \varnothing 675 mm



APW 5-star base in white nylon \varnothing 675 mm



for **APS, APG, APW, AL6 e AL9**: self-braking soft castors \varnothing 65 mm



AL9 5-star base in die-cast aluminum, aluminium grey painted \varnothing 650 mm



AL3 5-star base in die-cast polished aluminum Ø 654 mm with chromed gaslift



AL5 5-star base in die-cast polished aluminum Ø 654 mm with chromed gaslift



for **AL3 e AL5** self-braking soft castors Ø 65 mm **CHROMED**



AL4 (not for tilting versions) 4-star base in die-cast aluminum Ø 730 mm. with chromed feet and chromed gas-lift

Fixed frames: sled frame in steel tube, black painted, aluminium grey painted, or chromed

